

SHAHID GHANDI COMMUNICATION CABLE CO.

CODE: 0104-000

**TECHNICAL SPECIFICATION FOR
CONDUIT FILLED CABLE – FOAM SKIN INSULATION
(CFC-F)**



S . G . C . C

**SALE ENGINEERING DEPARTMENT
April 2007**

E-Mail:Info@sgccir.com



SPECIFICATION FOR CONDUT FILLED CABLE – FOAM SKIN INSULATION

1. GENERAL
2. ASSOCIATED DOCUMENTS
3. TEMPERATURE AND ENVIRONMENT
4. CONDUCTOR
5. CONDUCTOR INSULATION
6. TWISTING
7. STRANDING
8. FILLING COMPOUND
9. CORE WRAP
10. ALUMINUM SHIELD
11. OUTER JACKET
12. CABLE FORMATION
13. ELECTRICAL PARAMETERS
14. CABLE SIZES



1 - GENERAL

This specification details the construction of conduit filled telecommunication cables. The conductors are solid copper, covered with a foam plastic insulating compound and a thin layer of solid plastic as skin. The insulated conductors are twisted into pairs which are stranded into subgroups or groups and which in turn are assembled into a cable core. A moisture resistant filling compound surrounds the insulated conductors and fills the interstices between pairs and groups. After the core is wrapped, the cable structure is completed with Aluminum and LDPE jacket. The cable is fully color coded so that each pair in the cable is Distinguishable from every other pair. The color coding provides different color combinations of insulation for each pair in a 25 pair group or (subgroup) and provides colored bindings to distinguish individual groups from each other.

2 - ASSOCIATED DOCUMENTS

This specification is in accordance with REA'ASTM (American society for testing and material), BS (British Standard Institute), IP (Institute of Petroleum) and ISO (International Organization for Standardization) have been specified.

3 - TEMPERATURE AND ENVIRONMENT

The cables shall without detriment, perform suitably throughout a temperature range of -40 to +70 C. The cables shall suffer no deterioration from corrosive elements found naturally in the ground.

4 - CONDUCTOR

Each conductor is a solid wire of commercially pure annealed copper, smoothly drawn, circular in cross section, uniform in quality and free from defects. Conductors meet the quality requirements of ASTM B3. The maximum resistance for a cross section area of 1 mm² and a length of 1 km is 17.241 ohms when measured at 20±2 °C. The nominal conductor diameters may be 0.4 to 0.9 mm.

5 - CONDUCTOR INSULATION

Each conductor is uniformly covered with foam polyethylene conforming to ASTM D-1248. Type III class A category 4 or 5 Grade E8. The second layer of insulation will be a thin layer of solid PE. Insulation contains a suitable antioxidant system including a copper inhibitor.

The insulation will be uniform, smooth and The Eccentricity of the insulation according the procedure described in ASTM D-4565 is less than 0.1.



The insulation colors are in accordance with the following table:

TABLE (1)

PAIR NUMBER	CONDUCTOR A	CONDUCTOR B
1	White	Blue
2	White	Orange
3	White	Green
4	White	Brown
5	White	Grey
6	Red	Blue
7	Red	Orange
8	Red	Green
9	Red	Brown
10	Red	Grey
11	Black	Blue
12	Black	Orange
13	Black	Green
14	Black	Brown
15	Black	Grey
16	Yellow	Blue
17	Yellow	Orange
18	Yellow	Green
19	Yellow	Brown
20	Yellow	Grey
21	Violet	Blue
22	Violet	Orange
23	Violet	Green
24	Violet	Brown
25	Violet	Grey

6 - TWISTING

Two appropriately colored insulated conductors are uniformly twisted together to form a pair. The lays of all pairs are in the same direction and different for each pair in a unit.

7 - STRANDING

In cables having 25 pairs or less, the pairs colored according to the table (1) are stranded to form a cylindrical core. Stranding may be accomplished by using a concentric stranding or by using cross stranding where the pairs will change positions according to the change in direction of lay. In cables having more than 25 pairs the pairs colored according to table (1) form groups which are divided into two or more sub-groups according to tables (2, 3). The colored binders are used for binding and identifying each group or subgroup according to tables (5, 6, and 7). Each cable of 100 pairs and larger will have one (1) percent of spare pairs up to a value of 20 pairs for any given cable size according to tables (4).



The cables constructions are in accordance with the following tables:

TABLE (2)

pairs in cable	CENTER LAYER		FIRST LAYER		SECOND LAYER				
	subgroup or group No.	Pairs in subgroup or group	subgroup or group No.	Pairs in subgroup or group	subgroup or group No.	Pairs in subgroup or group			
10	1	10	-	-	-	-			
20	1	20	-	-	-	-			
30	1	12	-	-	-	-			
	1	13	-	-	-	-			
	2	5	-	-	-	-			
40	1	12	-	-	-	-			
	1	13	-	-	-	-			
	2	15	-	-	-	-			
* 50	1	12	-	-	-	-			
	1	13	-	-	-	-			
	2	12	-	-	-	-			
	2	13	-	-	-	-			
70	1	25	-	-	-	-			
	2	25	-	-	-	-			
	3	20	-	-	-	-			
100	1	25	-	-	-	-			
	2	25	-	-	-	-			
	3	25	-	-	-	-			
	4	25	-	-	-	-			
150	1	25	2	25	-	-			
			3	25	-	-			
			4	25	-	-			
			5	25	-	-			
			6	25	-	-			
			6	25	-	-			
* 200	1	12	3	25	-	-			
			4	25	-	-			
			5	25	-	-			
			6	25	-	-			
			7	25	-	-			
			8	25	-	-			
			8	25	-	-			
			8	25	-	-			
300	1	25	4	25	-	-			
			5	25	-	-			
			6	25	-	-			
			7	25	-	-			
			8	25	-	-			
			9	25	-	-			
			10	25	-	-			
			11	25	-	-			
			12	25	-	-			
			400	1	25	2	25	7	25
						3	25	8	25
						4	25	9	25
5	25	10				25			
6	25	11				25			
		12				25			
		13				25			
		14				25			
		15				25			
		16				25			

* 50 pairs group made by two 25 pair unit



TABLE (3)

pairs in cable	CENTER LAYER		FIRST LAYER		SECOND LAYER			
	subgroup or group No.	Pairs in subgroup or group	subgroup or group No.	Pairs in subgroup or group	subgroup or group No.	Pairs in subgroup or group		
500	1	50	4	50	-	-		
	2	50	5	50	-	-		
	3	50	6	50	-	-		
			7	50	-	-		
			8	50	-	-		
			9	50	-	-		
			10	50	-	-		
600	1	100	2	100	-	-		
			3	100	-	-		
			4	100	-	-		
			5	100	-	-		
			6	100	-	-		
800	1	100	2	100	-	-		
			3	100	-	-		
			4	100	-	-		
			5	100	-	-		
			6	100	-	-		
			7	100	-	-		
			8	100	-	-		
900	1	100	4	100	-	-		
	2	100	5	100	-	-		
	3	100	6	100	-	-		
			7	100	-	-		
			8	100	-	-		
			9	100	-	-		
1000	1	100	4	100	-	-		
			5	100	-	-		
			6	100	-	-		
			7	100	-	-		
			8	100	-	-		
			9	100	-	-		
			10	100	-	-		
1200	1	100	4	100	-	-		
			5	100	-	-		
			6	100	-	-		
			7	100	-	-		
			8	100	-	-		
			9	100	-	-		
			10	100	-	-		
			11	100	-	-		
			12	100	-	-		
			1800	1	100	2	100	8
3	100	9				100		
4	100	10				100		
5	100	11				100		
6	100	12				100		
7	100	13				100		
	100	14				100		
	100	15				100		
	100	16				100		
	100	17				100		
	100	18				100		



Note:

Each cable of 100 pairs and larger will have one (1) percent of spare pairs up to a value of 20 pairs for any given cable size according to tables (4)

The spare pair colors are in accordance with the following table:

TABLE (4)

SPARE PAIR NUMBER	CONDUCTOR A	CONDUCTOR B
1	White	Red
2	White	Black
3	White	Yellow
4	White	Violet
5	Red	Black
6	Red	Yellow
7	Red	Violet
8	Black	Yellow
9	Black	Violet
10	Yellow	Violet
11	Blue	Orange
12	Blue	Green
13	Blue	Brown
14	Blue	Grey
15	Orange	Green
16	Orange	Brown
17	Orange	Grey
18	Green	Brown
19	Green	Grey
20	Brown	Grey



The binder colors for subgroup (less than 100 pair) are in accordance with the following table:

TABLE (5)

Subgroup No.	Color of binding	Pair count
1	White -Blue	1-10 OR 1-20 OR 1-12 OR 13-25 OR 1-25
2	White - Orange	1-5 OR 1-15 OR 1-12 OR 13-25 OR 1-25
3	White -Green	1-20 OR 1-25
4	White -Brown	1-25

The binder colors for subgroup (100 and more than 100 pair) are in accordance with the following table:

TABLE (6)

Subgroup No.	Color of binding	Pair count
1	White -Blue	1-25
2	White - Orange	26-50
3	White -Green	51-75
4	White -Brown	76-100
5	White - Grey	101-125
6	Red -Blue	126-150
7	Red - Orange	151-175
8	Red -Green	176-200
9	Red - Brown	201-225
10	Red - Grey	226-250
11	Black- Blue	251-275
12	Black-Orange	276-300
13	Black- Green	301-325
14	Black-Brown	326-350
15	Black- Grey	351-375
16	Yellow- Blue	376-400
17	Yellow-Orange	401-425
18	Yellow-Green	426-450
19	Yellow-Brown	451-475
20	Yellow- Grey	476-500
21	Violet-Blue	501-525
22	Violet-Orange	526-550
23	Violet-Green	551-575
24	Violet-Brown	576-600



The binder colors for group are in accordance with the following table

TABLE (7)

Group No.	Color of binding	Pair count
1	White -Blue	1-100
2	White - Orange	101-200
3	White -Green	201-300
4	White -Brown	301-400
5	White - Grey	401-500
6	Red -Blue	501-600
7	Red - Orange	601-700
8	Red -Green	701-800
9	Red - Brown	801-900
10	Red - Grey	901-1000
11	Black- Blue	1001-1100
12	Black-Orange	1101-1200
13	Black- Green	1201-1300
14	Black-Brown	1301-1400
15	Black- Grey	1401-1500
16	Yellow- Blue	1501-1600
17	Yellow-Orange	1601-1700
18	Yellow-Green	1701-1800

8 - FILLING COMPOUND

The interstices between conductors, sub-groups, groups and super groups will be filled with filling compound.

9 - CORE WRAP

The core is completely covered with one layer of non-hygroscopic non-wicking, dielectric tape. The tape may be applied helically or longitudinally and have a minimum over lap of 30% of the width of the wrapping or 10 mm whichever is the least (Note: for cable sizes of less than 150 pairs the overlap will not be less than 5mm).The core wrap provide a sufficient heat barrier to prevent visible evidence of conductor insulation deformation or adhesion between conductors caused by adverse heat transfer during the jacketing operation.

10 - ALUMINUM SHIELD

An aluminum tape with copolymer coating on both sides will be applied longitudinally with an adequate overlap for the cables with a core diameter of 20mm or less the overlap will be 3mm minimum and for the cables with a core diameter greater them 20mm the overlap will be 6mm minimum. The Aluminum thickness is 200 micron and the copolymer coating on each side has the thickness about 38 microns.




11 - OUTER JACKET

A black polyethylene jacket in accordance with ASTM D-1248 type II class C category 4 or 5 grade J-3. The nominal jacket thickness will be according the following table (8). The average thickness at any cross section shall not be less than 90% and minimum spot thickness shall not be less than 70% of the nominal thickness. The nominal jacket thickness is in accordance with the following table

TABLE (8)

Core Dia of cable in mm	Thickness of jacket in mm
Up to 30	1.8
30.1 - 35	2.1
35.1 - 45	2.3
45.1 - 55	2.5
55.1 and Larger	2.8

12 - CABLE FORMATION

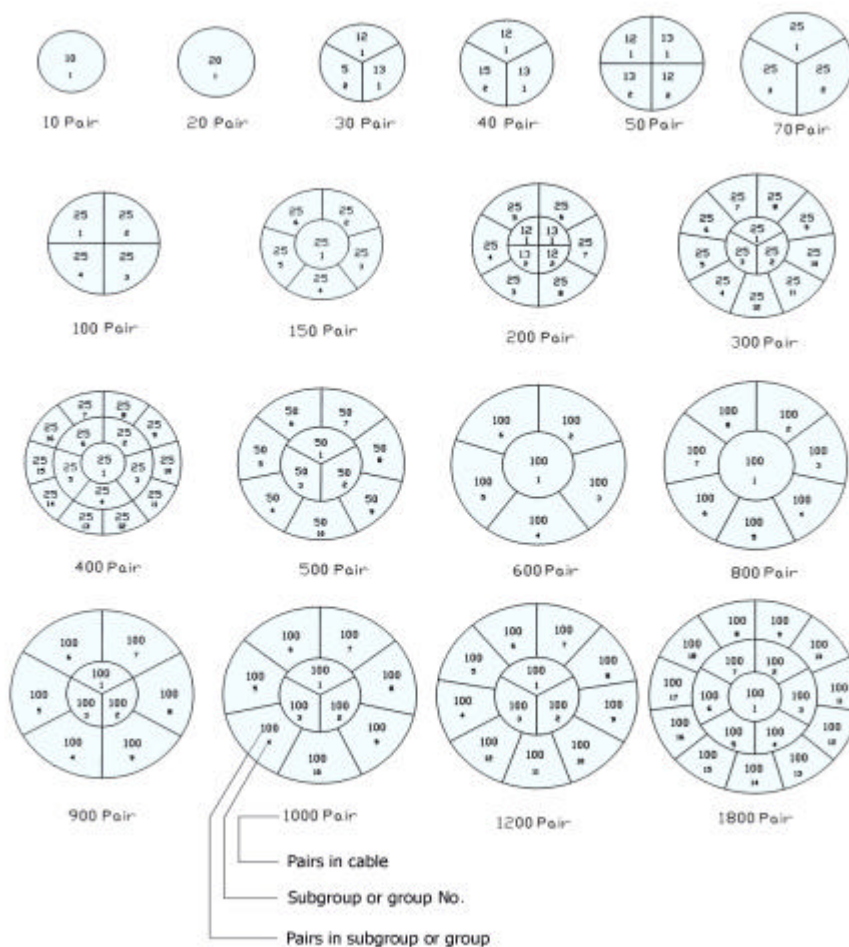

Note:

The spare pairs can be in any subgroup or group.



13 - ELECTRICAL PARAMETERS

TABLE (9)

PARAMETERS		UNIT	0.4 mm	0.4 mm	0.6 mm
Resistance	Max. Ind	Ω/km	147	94	65
	Max. Ave	Ω/km	139	89	62
Resistance Unbalance	Max. Ind	%	5	4.5	4.5
	Max. Ave	%	2	1.5	1.5
Dielectric Strength	Conductor to conductor	Kv/ 3 sec	2.8	3.5	4.5
	Conductor to ground	Kv/ 3 sec	15	15	15
Mutual Capacitance	*Max. Ind	Nf/km	57	57	57
	** Ave	Nf/km	52 ± 2	52 ± 2	52 ± 2
Capacitance Unbalance	***Pair to ground Max. Ind	Pk/km	2625	2625	2625
	***Pair to ground Max. Ave	Pk/km	574	574	574
	Pair to pair Max. Rms	Pk/km	45	45	45
Attenuation	Nom 1024 KHz	dB/Km	23.5	18.7	15.2
	Nom 1500 KHz	dB/Km	28	22.4	18.5
Crosstalk	Worst power-sum 1024	dB/Km	35	35	35
	Mean power-sum 1024	dB/Km	39	40	41
	Worst power-sum 3150	dB/Km	26	26	26
	Mean power-sum 3150	dB/Km	30	31	32

* For cables less than 12 pairs 58

** For cables less than 12 pairs 52 ± 4

*** Only for 12 pair or more

12 - CABLE SIZES

Cables size for 0.4 mm is in accordance with the following table:

TABLE (10-A)

SIZE of CABLE	WEIGHT (kg/km)	DIAMETER (mm)	REEL LENGHT (m)
10 × 2 × 0.4	90	9	1010 - 1020
20 × 2 × 0.4	140	11	1010 - 1020
30 × 2 × 0.4	190	13	1010 - 1020
40 × 2 × 0.4	220	14	1010 - 1020
50 × 2 × 0.4	270	15	1010 - 1020
70 × 2 × 0.4	340	16	1010 - 1020
100 × 2 × 0.4	450	18	1010 - 1020
150 × 2 × 0.4	640	21	1010 - 1020
200 × 2 × 0.4	855	25	1010 - 1020
300 × 2 × 0.4	1220	29	1010 - 1020
400 × 2 × 0.4	1570	32	760 - 765
500 × 2 × 0.4	1980	37	760 - 765
600 × 2 × 0.4	2315	39	505 - 510
1000 × 2 × 0.4	3725	49	255 - 260
1200 × 2 × 0.4	4575	55	255 - 260
1800 × 2 × 0.4	6800	67	255 - 260



Cables size for 0.6 mm is in accordance with the following table:

TABLE (10-B)

SIZE of CABLE	WEIGHT (kg/km)	DIAMETER (mm)	REEL LENGHT (m)
10 × 2 × 0.6	150	13	1010 - 1020
20 × 2 × 0.6	245	16	1010 - 1020
30 × 2 × 0.6	335	19	1010 - 1020
40 × 2 × 0.6	410	20	1010 - 1020
50 × 2 × 0.6	500	22	1010 - 1020
70 × 2 × 0.6	665	26	1010 - 1020
100 √2 × 0.6	915	29	1010 - 1020
150 × 2 × 0.6	1310	34	760 - 765
200 × 2 × 0.6	1740	41	505 - 510
300 × 2 × 0.6	2560	48	505 - 510
400 × 2 × 0.6	3320	55	255 - 260
500 × 2 × 0.6	4170	61	255 - 260
600 × 2 × 0.6	4905	66	255 - 260
1000 × 2 × 0.6	7960	82	255 - 260